

Accessories

SUNMI MAX Cash Drawer

Maximize your potential.

MAX capacity, smarter cash handling.

The cash drawer's front media slot, 5 bill trays, 4 fixed and 6 removable coin trays, making the drawer compatible with over 20 currencies.

MAX durability, more stable.

Adopted high-toughness and rust-free ABS polymer, trapezoidal shape and internal honeycombs, Max Cash Drawer can bear 10kg.

MAX experience, minimized nuisance.

The rear cable drawer keeps your countertop tidy. Its hidden rails and durable rollers allow a smooth and quiet opening and closing of the drawer.

Over **1,000,000** operations supported.

MAX security with multiple protections.

3-position lock equipped. The drawer can operate on a wide range of voltages, avoiding the risk of damaging the drawer due to voltage mismatch.

Customize reminders with APIs.

It can be integrated with POS apps to let you know your drawer open/close status anytime from anywhere, thus to further ensure your cash security.

Directly open the drawer with a cash drawer trigger.

USB and Bluetooth enabled. You can open your cash drawer even with no dedicated POS terminal.




MAX capacity, smarter cash handling.

With **5** bill trays, **4** fixed and **6** removable coin trays, MAX Cash Drawer is designed for your booming business.

MAX durability, more stable.

Robust, yet good-looking.
The drawer is made of **high-toughness** and rust-free ABS polymer, **strong** and **impact resistant**.

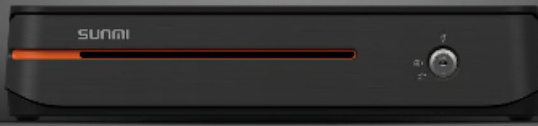

MAX security with multiple protections.

3-position lock

- Open automatically by driver
- Open manually by key
- Lock



MAX experience, minimized nuisance.

Say goodbye to a cluttered countertop with a rear cable drawer and a concealed adapter.



Directly open the drawer with a cash drawer trigger.

USB and Bluetooth enabled. Use it to open a drawer directly using your tablet, laptop or computer.



SUNMI MAX Cash Drawer Tech Specs

General Configuration

Cash Drawer ABS drawer	Trays 5 bill trays, 1 media slot 4 fixed & 6 removable coin trays	Cable RJ12, 6P4C, 0.8m	Lock 3-position lock (Open by driver/by key/lock)
Bill Clip Plastic and metallic	Cable Storage Rear-set drawer	Drive Voltage DC9V~24V, 1A	Drive Pulse Width 100ms~300ms
Drive Protections 3A Overcurrent Protection Input Pulse Overvoltage Protection Input Pulse Timeout Protection Self-Adaptive to 9V-28V Input Voltage Contact ESD 8KV / Air ESD 15KV Thermal Shutdown	Service Life ≥One million operations	Status Feedback Status detection switch	Environment Operating temperature and humidity: 0°C~45°C, 30%~85% Storage temperature and humidity: -20°C~60°C, 10%~90%
Weight 5.8 Kg	Dimensions W430mm x L457mm x H88mm		