




# ACCESSORIES



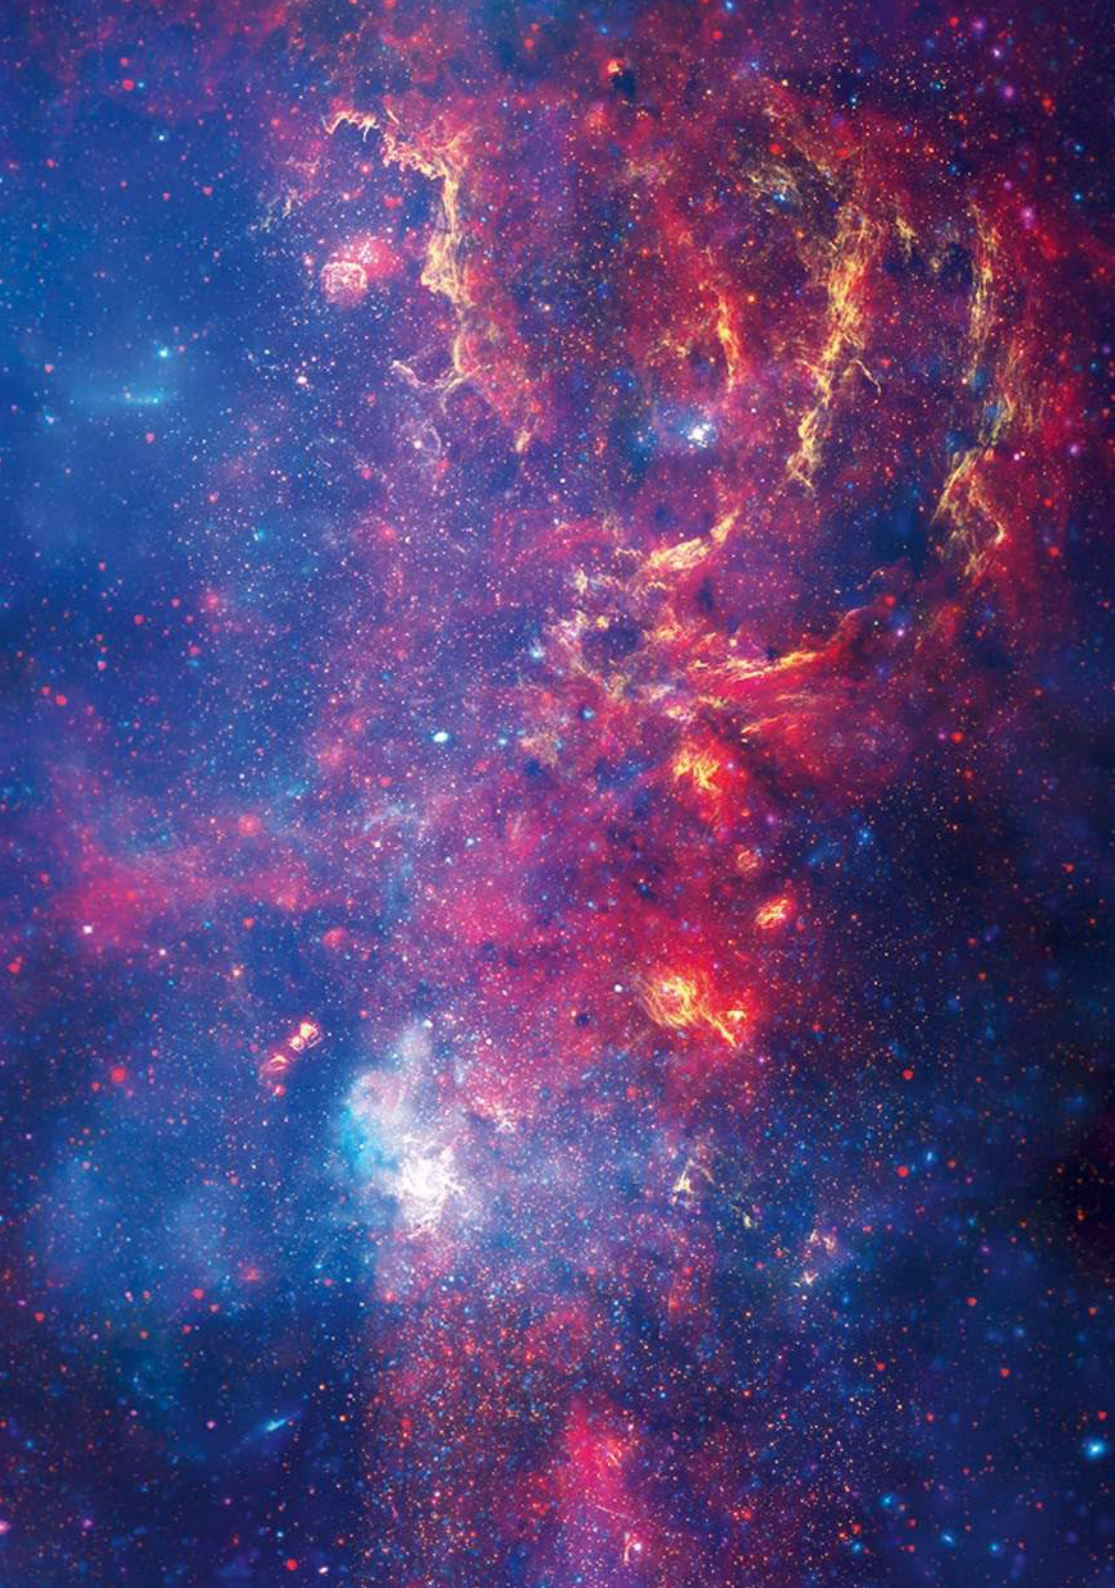

# Label Finishing with DTM Print



With label finishing solutions from DTM Print you can easily



**lamine, cut  
and more**  
with the DTM LF140e



**apply labels to  
your product**  
with label applicators



**unwind and  
rewind**  
with the DTM Winder Series



# LF140e

LABEL FINISHING SYSTEM



**Made in Europe**  
With an extended  
3 year warranty



**Flexibility**  
Cut any size and shape  
you like



**Cut Speed**  
Max. 600 m/s (24"/s)  
in all directions



**Resistance**  
Lamination increases the  
durability of labels

## Digital on-demand short to medium label converting machine

The DTM LF140e is a compact, out of the box, finishing system that makes the converting process of your continuous label roll stock easier than ever. Unwinding, laminating, digital die-cutting, waste matrix removing, slitting and rewinding the finished rolls – all combined in a powerful machine which takes only minutes to set-up and run.

Unlike other systems the LF140e features optical black mark registration through an integrated camera and LED spotlight, which guarantees an accurate repetitive precision even with complex cuts.

In addition, the control unit of a large 11.6" touch screen really stands out. USB, Ethernet and also WLAN connectivity for accessing external cutting jobs is also included.

### Keyfacts

- ▶ Open frame construction – easy media loading with an open front side
- ▶ Ultrasonic media tension control – means no moveable sensor parts to fail
- ▶ Camera sensing – more accuracy and speed in cutting
- ▶ Blank label production – converting blank stock into die-shaped rolls for printing afterwards
- ▶ Matrix pressure roller – to avoid media jam on complex matrix shapes by flattening the uptake material
- ▶ Remote assistance – if connected to the internet DTM Print offers online support and remote firmware/software upgrades



### What's in the box?

- ▶ Completely assembled and pre-installed LF140e
- ▶ Steel workbench with mounted rollers
- ▶ Instructions

### More information

Scan the QR code to see all videos related to the LF140e.

Visit [dtm-print.eu](http://dtm-print.eu) for detailed information.



# LF140e

LABEL FINISHING SYSTEM



**Waste Press Roll**  
Press roll reduces the inflation of the roll.



**Matrix Removal**



**Liner Slitting**  
Can hold up to 6 blades to slit the web into finished rolls.




**Rewinding**

**Solid Steel Bench on Wheels**  
45 mm x 45 mm x 1.5 mm welded frame with powder coating.

**Industrial-Grade 11.6" Touch Screen**  
Windows 10 based with extended connectivity:  
6 x USB 2.0/3.1, RJ-45 1 GB Ethernet and WLAN.

**LED Spotlight**





**Digital Die-Cutting**  
With a maximum cutting speed of 600 mm/s and up to 450 gf cutting force for accurate results.



**Laminating**  
Optional laminate film to protect your labels against harsh environments or applying specific surface structure as an extra finish.



**Media Tension Control**  
Measures the outside diameter of the rolls and adjusts the web tension.



**Roll Feed**  
Printed media requires an imprinted black mark (2 mm x 2 mm or 4 mm x 4 mm), unprinted media can be cut continuously.

**Solid Wooden Desktop**  
Lower storage shelf made of 15 mm multilayer panel with block screen print.

# Technical Specifications – Comparison Table

	<h2>LF140e</h2> <p>LABEL FINISHING SYSTEM</p>
<b>Media Width</b>	100 mm - 140 mm (3.93" - 5.51")
<b>Max. Media Thickness</b>	0.23 mm (0.05 mil)
<b>Max. Cutting Width</b>	122 mm (4.8")
<b>Max. Cut Speed</b>	600 mm/s (24"/s) in all directions
<b>Label Length</b>	10 mm - 350 mm (0.39" - 13.77")
<b>Min. Slitting Width</b>	19 mm (0.75")
<b>Number of Slitting Blades</b>	Max. 6
<b>Supply Roll (Input &amp; Output)</b>	Up to 200 mm (7.78") OD with a 76.2 mm (3") ID
<b>Indicator Lights</b>	Power, Stop/Go
<b>Controls</b>	Integrated 11.6" touch screen PC
<b>Power Requirements</b>	100 V - 240 V AC (50/60 Hz)
<b>Power Consumption</b>	Idle: 29 W   Average: 60 W
<b>Certifications</b>	UL, UL-C, CE, FCC Class A, RoHS, UKCA
<b>Weight</b>	LF140e: 105 kg Workbench: 49 kg Total: 210 kg
<b>Dimensions (WxHxD)</b>	LF140e: 116 cm x 68 cm x 78 cm Workbench: 124 cm x 79 cm x 88 cm Shipping palette: 137 cm x 93 cm x 101 cm
<b>What's in the Box</b>	LF140e Label Finishing System (pre-assembled), two multiplex workbench plates, steel workbench on wheels, installed 12" touch screen PC, calibration tools, instructions, power cable
<b>Warranty</b>	36 months* (after product registration, for devices purchased in EU/EFTA countries and UK)
<b>Manufacturer</b>	DTM Print GmbH

\* Wearable parts 1 year

# LF140e Plotter

**LABEL FINISHING SYSTEM**

<b>Linear Cut Speed</b>	Dependent on shape complexity
<b>Programmable Cutting Force</b>	4.41 N (450 gf) in 38 steps
<b>Cut Precision</b>	± 0.3 mm (0.012")
<b>Drive Method</b>	Digital servo drive
<b>Test Cut Function</b>	Yes
<b>Black Mark Registration</b>	Camera recognition via 2 mm x 2 mm or 4 mm x 4 mm black mark
<b>Display</b>	Graphic type LCD with backlight (240 x 128 dots)
<b>Cut ability</b>	Printed and blank media
<b>Data Interface</b>	USB 2.0, Ethernet
<b>CPU</b>	32-bit CPU
<b>Interface &amp; Software</b>	DTM Print LF140e Label Finishing Software
<b>Certifications</b>	UL, UL-C, CE, FCC Class A, RoHS, UKCA
<b>Manufacturer</b>	Graphtec

# Label Applicators



**Compact Size**  
Fit on desks and countertop



**Models for**  
flat and round containers as  
well as pouches available



**Application Speed**  
Up to 1,500 objects per hour



**Label Range**  
Works with virtually any label  
material including clear labels

## Accurate labelling – quick and easy

Label applicators are a core component of labelling machines and systems in the packaging industry and help to increase your production throughput. They are also known as labelling units and are used to apply and dispense self-adhesive labels in many different applications. Product and identification labels are applied easily, straight and without wrinkles or folds in exactly the desired location, giving finished products a highly professional look.

It is well known that the better and more professional your labels look, the more you will sell. This includes, that labels are also accurately labelled.

With quick setup and easy operation, the Label Applicators significantly increase the number of containers that can be labelled per hour versus manually applying labels. With their compact size they fit on most desks and countertops and are built with heavy-duty sheet metal and steel for long product life.

The Label applicators are the perfect accessories for virtually any roll-wound label including clear labels, no matter the printing technology.

### Speed up your production with AP-Series and sell more of your products:

1. Insert the label roll and set the guides.
2. Place your container in the machine.
3. Pull the arm/press the footswitch/button and your label is applied.

### What's in the box?

- ▶ Label applicator
- ▶ Instructions



*DTM AP380e and PL400e feature a liner rewriter (for an organised production line).*

### Speed up your production with PL400e Pouch Labeller and sell more of your products:

1. Insert the label roll and set the guides.
2. Place your pouch in the machine and your label is applied.

### More information

Scan the QR code to see all videos related to the applicators.

Visit [dtm-print.eu](http://dtm-print.eu) for detailed information.



# AP-Series

## LABEL APPLICATORS



### AP550e Label Applicator for Flat Containers

Apply labels at speeds of up to 500 containers/hour.

#### Key facts

- ▶ For flat surfaces, such as rectangular or many tapered bottles, boxes, packages, bags, pouches, lids and more
- ▶ No air-pressure supply required (no expensive, noisy and maintenance-prone air compressors)
- ▶ LED display with built-in counter

#### Optional Modification

For all unevenly shaped or very small containers that would be difficult to hold during labelling, we recommend a customised holder. You can make this at home with the appropriate materials or use our expertise and experience. Do not hesitate to contact us about the right AP550e holder for your container.



With the built-in LED display users can easily set-up variable spacings, save up to nine different container offsets and see the number of applied labels.

## AP360e Label Applicator for Round Containers

Apply labels at speeds of up to 1,200 containers/hour.

### Key facts

- ▶ For cylindrical containers, including round bottles, cans, jars and tubes
- ▶ Built-in spring-loaded pressure arm applies labels firmly
- ▶ Securely affix labels even on very small radius containers such as lip balm tubes

**AP360e** is the base model, which applies single labels at a time.



## DTM AP380e Label Applicator with Liner Rewinder

Apply labels at speeds of up to 1,500 containers/hour.

### Key facts

- ▶ Features a liner rewriter that automatically rewinds the waste liner, keeping the production line clean and organised
- ▶ Operates with button or footswitch
- ▶ Enables two stop modes which stop the container either immediately or delayed after label application

**AP380e** is the advanced model, 30% faster than the AP360e and applies two different labels with variable spacing to a single container, perfect for alternating labels as used on e.g. wine bottles. A built-in LED counter, memory for up to nine front-to-back label offsets is also included as well as an integrated label rewriter.



We're all different and so are the products we want our labels to stick on. Therefore, don't hesitate to contact us for optional modifications on the AP-Series to make it fit your needs.

# Technical Specifications – Comparison Table

	<b>AP550e</b> LABEL APPLICATOR	
Number of Labels Dispensed per Trigger	1	
Speed	Up to 500 containers per hour	
Container Shape	Flat and many tapered	
Container Diameter	-	
Container Width	Max. 305 mm (12")*	
Container Height	0.05 mm - 203 mm (0.002" - 8")**	
Container Depth	Max. 310 mm (12.2") *	
Label Width	19 mm - 101.6 mm (0.75" - 4")	
Label Height	19 mm - 152.4 mm (0.75" - 6")	
Supply Roll	Up to 203 mm (8") OD with a 50.8 mm to 76.2 mm (2" to 3") ID wound out, die-cut with waste removed, black mark or gap (clear labels require black mark)	
Label Liner Rewinder	No	
Label Sensor Type	Optical sensor	
Indicator Lights	LED display with built-in up/down counter and saved jobs	
Controls	Mode, Recall/Reset, Up, Down	
Power Requirements	100 V	
Power Consumption	Idle: 4.2 W   Average: 20 W	
Certifications	UL, U	
Weight	10.9 kg	
Dimensions (WxHxD)	305 mm x 541 mm x 256 mm - 391 mm	
Gap between labels		
Label Type	Die cut with waste removed	
Liner Thickness	50,8 µm - 254 µm (smoothness will affect feeding - a liner that is too slippery or too thin will slip through the drive rollers)	
Label + Adhesive Thickness	127 µm - 381 µm	
Wind Direction	Wound out - see position chart on our website (position 3 or 4 for most containers)	
What's in the Box	AP550e Label Applicator, instructions, universal power supply	
Warranty	36 months (after product registration, for devices purchased in EU/EFTA countries and UK)	
Manufacturer	Primera Technology, Inc.	

\* Container may overhang platform to the front and/or either side.

\*\* Containers shorter than 20.3 mm may require adaptive spacers

<b>AP360e</b> LABEL APPLICATOR	<b>AP380e</b> LABEL APPLICATOR
1	1 or 2 – front and back
101 mm/s (4"/s) or up to 1,200 containers per hour	142 mm/s (5.6"/s) or up to 1,500 containers per hour
Cylindrical and many tapered	
15 mm - 170 mm (0.6" - 6.7")	
25.4 mm - 238 mm (1" - 9.4")	
15 mm - 170 mm (0.6" - 6.7")	
-	-
19 mm - 209 mm (0.75" - 8.25")	
19 mm - 609.6 mm (0.75" - 24")	
Up to 203 mm (8") OD with a 50.8 mm to 76.2 mm (2" to 3") ID wound out, die-cut	
No	Yes
Mechanical sensor	
-	LED display with built-in up/down counter and saved jobs
Footswitch	Footswitch, Push button, Mode, Recall/Reset, Up, Down
240 V AC (50/60 Hz), 12 V DC, 5.0 A	
Idle: 1.6 W   Average: 20 W	
UL-C, CE, FCC Class A, RoHS, UKCA	
7.26 kg	9.07 kg
340 mm x 226 mm x 328 mm	340 mm x 226 mm x 508 mm
Recommended: 3 mm - 6 mm	
Die cut with or without waste removed; clear labels can be used	
50,8 µm - 254 µm (smoothness will affect feeding - a liner that is too slippery or too thin will slip through the drive rollers)	
127 µm - 381 µm	
Wound out - see position chart on our website (position 3 or 4 for most containers)	
AP360e Label Applicator, instructions, universal power supply	DTM AP380e Label Applicator, instructions, universal power supply
36 months (after product registration, for devices purchased in EU/EFTA countries and UK)	
Primera Technology, Inc	DTM Print GmbH

# PL 400e

POUCH LABELLER



## PL400e Pouch Labeller for Pouches

Apply labels at speeds of up to 1,300 pouches/hour.

### Key facts

- ▶ For pouches in different sizes and materials – also works with zippers, euro holes and degassing/aroma valves
- ▶ Features a liner rewinder that automatically rewinds the waste liner, keeping the production line clean and organised
- ▶ LED display with built-in counter and memory for up to nine label offsets



The PL400e Pouch Labeller is a fast, precise, and user-friendly solution for applying labels to unfilled pouches and other flat items like envelopes and bags. It increases productivity, while its labelling options ensure a polished, professional look. The machine's intuitive setup allows for quick training and minimal downtime.

Designed for versatility and efficiency, the PL400e applies labels smoothly and evenly with adjustable spacing for front and back labelling.



*With the built-in LED display users can easily set-up variable spacings, save up to nine different container offsets and see the number of applied labels.*

# Technical Specifications



## PL 400e POUCH LABELLER

Number of Labels Dispensed per Trigger	1
Speed	142 mm/s (5.6"/s) or up to 1,300 pouches per hour
Container Shape	Flat pouches up to 5.3 mm (0.21") thick
Container Diameter	-
Container Width	81 mm - 229 mm (3.2" - 9")
Container Height	45 mm - 812 mm (1.75" - 32")
Container Depth	-
Label Width	19 mm - 209 mm (0.75" - 8.25")
Label Height	19 mm - 381 mm (0.75" - 15")
Supply Roll	Up to 203 mm (8") OD with a 50.8 mm to 76.2 mm (2" to 3") ID wound out, die-cut
Label Liner Rewinder	Yes
Label Sensor Type	Mechanical sensor
Indicator Lights	LED display with built-in up/down counter and saved jobs
Controls	Mode, Recall/Reset, Up, Down
Power Requirements	100 V - 240 V AC (50/60 Hz), 12 V DC, 5.0 A
Power Consumption	Idle: 1.6 W   Average: 20 W
Certifications	UL, UL-C, CE, FCC Class A, RoHS, UKCA
Weight	8.4 kg
Dimensions (WxHxD)	340 mm x 185 mm x 508 mm
Gap between labels	Recommended: 3 mm - 6 mm
Label Type	Die cut with or without waste removed; clear labels can be used
Liner Thickness	50.8 µm - 254 µm (smoothness will affect feeding - a liner that is too slippery or too thin will slip through the drive rollers)
Label + Adhesive Thickness	127 µm - 381 µm
Wind Direction	Wound out - see copy position chart on our website (position 3 or 4 for most containers)
What's in the Box	PL400e Pouch Labeller, instructions, universal power supply
Warranty	36 months (after product registration, for devices purchased in EU/EFTA countries and UK)
Manufacturer	Primera Technology, Inc.



# DTM Winder Series



## Winding Speed

User adjustable, up to 30 m/min



## Roll Width

Up to 220 mm (8.66")



## Automatic Stop

When end of roll or another interruption occurs



## Winding Direction Switch

For either label inside or outside

## Label winding made easy

Winders from DTM Print make it easy to un- and rewind large quantities of labels. Double your unwind capacity and no longer self-rewind the labels by hand.

### Key facts

They're perfect for use with virtually any desktop label printer, no matter the printing technology. The DTM Label Winder Series includes the following models:

- ▶ DTM RW-4 Label Rewinder
- ▶ DTM RW-7 Label Rewinder
- ▶ DTM RW-8 Label Rewinder

The lateral guides of all **DTM Label Winders** guarantee an optimal parallel, tight and straight winding, which is essential for further processing, e.g. in a labelling unit. There's no need to work by hand anymore!

Load an up to 220 mm (8.66") wide roll and double your unwind capacity. Larger rolls typically have lower costs per label and save time as reloading cycle decreases.

Each RW-4, RW-7 and RW-8 works as an unwinder, too!

### What's in the box?

- ▶ Label winder
- ▶ 1.5", 2" and 3" core adaptors (RW-4/RW-7 only)
- ▶ Instructions

Tape the printed output onto a core of your choice, drop the dancer arm and start your job. Your labels will be rewound with perfect alignment and just the right amount of tension for either hand application or on a label applicator.

The **DTM UW-4 Passive Label Unwinder** works non-electric and stand-alone.

It's the perfect accessory if you want to increase your unwind capacity with up to 114.3 mm (4.5") wide rolls.



*DTM UW-4 Passive Label Unwinder in combination with DTM FX510e Foil Imprinter*

### More information

Scan the QR code to see all videos related to the winders.

Visit [dtm-print.eu](http://dtm-print.eu) for detailed information.



# RW-4 RW-7

LABEL REWINDER LABEL REWINDER



With modular cores the RW-4 and RW-7 Label Rewinder from DTM Print are your flexible companions for a time-saving workflow.

## Key facts

- ▶ Modular core adaptors
- ▶ Coloured LED indicator provides operation status
- ▶ Usable as rewinder and unwinder by easily switching from "Inside" to "Outside" mode
- ▶ Gummed dancer arm attracts dust and keeps it off your label surface
- ▶ User adjustable winding speed of up to 355 mm/s (14"/s)



Load a roll with a width of up to 178 mm (7") to the RW-7 or one with up to 120 mm (4.72") width to the RW-4, either wound-in or wound-out. The arm can hold a roll weight of up to 5 kg and with the core adaptors you're super flexible. Easily change from 1" cores (without adaptor) to 1.5", 2" or 3" cores.



Wound In/Label Inside



Wound Out/Label Outside

# RW-8

LABEL REWINDER



The RW-8 Label Rewinder from DTM Print is your perfect accessory for heavy duty jobs. It offers support for heavy rolls with its solid metal construction.

### Key facts

- ▶ Supports up to 250 mm (10") OD with a roll weight of up to 8 kg
- ▶ Control panel allows the user to set a speed limit and winding directions
- ▶ User adjustable winding speed of up to 500 mm/s (19.6"/s)
- ▶ L-shaped support arm enables the use of heavy and wide rolls
- ▶ Usable as rewinder and unwinder by easily switching from "Face-In" to "Face-Out" mode



The RW-8 Label Rewinder complements the DTM Winder Series in the upper range for up to 220 mm wide rolls. For heavy and very wide rolls an L-shaped support arm is included, which can be mounted in seconds if required.



Control Panel



L-shaped support arm



# Technical Specifications – Comparison Table

	<b>RW-4</b> LABEL REWINDER	<b>RW-7</b> LABEL REWINDER
<b>Winding Speeds</b>	Up to 355 mm/s (14"/s)	
<b>Maximum Roll Width</b>	120 mm (4.72")	177.8 mm (7")
<b>Maximum Roll Diameter</b>	203.2 mm (8")	152.4 mm (6")
<b>Maximum Roll Weight</b>	5 kg	
<b>Core Size</b>	Coreless, 25.4 mm (1"), 38.1 mm (1.5") 50.8" (2"), 76.2 mm (3")	
<b>Indicator Lights</b>	Power, Winding Mode, Alert	
<b>Controls</b>	Power, winding direction switch (Label Inside/Label Outside), speed adjustment wheel	
<b>Power Requirements</b>	100 V - 240 V AC (50/60 Hz), 24 V DC, 2 A	
<b>Power Consumption</b>	Idle: 3.95 W   Average: 13.3 W	Idle: 3.8 W   Average: 12 W
<b>Certifications</b>	CE, RoHS, TÜV, FCC Class A, UKCA	
<b>Weight</b>	5 kg	
<b>Dimensions (WxHxD)</b>	180 mm x 303 mm x 349 mm	180 mm x 303 mm x 394 mm
<b>What's in the Box</b>	RW-4 Label Rewinder, core adaptors (1.5", 2", 3"), universal power supply, instructions	RW-7 Label Rewinder, core adaptors (1.5", 2", 3"), universal power supply, instructions
<b>Warranty</b>	36 months (after product registration, for devices purchased in EU/EFTA countries and UK)	
<b>Manufacturer</b>	DTM Print GmbH	

**Important Note:** Pliability/flexibility/rigidity of the label is an important factor for the smooth transport of the label rolls in the rewriter. If the label is too flexible, no matter the thickness, it can cause uneven winding, slipping or stopping of the rewriter. Polypropylene, polyester and vinyl labels tend to be more flexible than paper labels. If you suspect the label stock is too flexible, it is recommended that the stock is tested on the rewriter before making any purchase decisions of label stock or the rewriter. Genuine DTM Label Stock substrates do not slip or cause any damage.

<b>RW-8</b> LABEL REWINDER	<b>UW-4</b> PASSIVE UNWINDER
Up to 500 mm/s (19.6"/s)	-
220 mm (8.66")	120 mm (4.75")
250 mm (10")	254 mm (10")
8 kg	5 kg
76.2 mm (3")	Works with virtually any roll core bigger than 25.4 mm (1")
Power, Winding Mode, Alert	-
Power, winding direction buttons (Face-In/Face-Out), speed adjustment buttons	-
100 V - 240 V AC (50/60 Hz), 24 V DC, 2.5 A	Non-electric
Idle: 1.5 W   Average: 3.45 W	-
CE, RoHS, FCC Class B, UKCA	-
9 kg	0.5 kg
600 mm x 450 mm x 360 mm	136-193 mm x 194 mm x 252 mm
RW-8 Label Rewinder, power supply, instructions	DTM UW-4 Passive Unwinder, core adaptor (3"), instructions
36 months (after product registration, for devices purchased in EU/EFTA countries and UK)	
DTM Print GmbH	

# LOOKING FOR LABEL PRINTERS?

We're happy to find the best labelling solution for you and your business!

COMPREHENSIVE ADVICE?

✉ [sales@dtm-print.eu](mailto:sales@dtm-print.eu)

MORE INFORMATION:

🌐 [supplies.dtm-print.eu](http://supplies.dtm-print.eu)



Stay up to date and follow us on social media



DTM Print GmbH  
Mainzer Str. 131  
65187 Wiesbaden  
Germany  
+49 611 927770  
[sales@dtm-print.eu](mailto:sales@dtm-print.eu)  
[dtm-print.eu](http://dtm-print.eu)

